




i-Vu® Building Automation System ZS Space Sensors



Carrier's line of intelligent ZS Space Sensors provide the function and flexibility you need to manage the conditions important to the comfort, productivity, and sustainability of your building. The ZS sensor is available in a variety of zone sensing combinations to address your application needs. These combinations include temperature, relative humidity, and indoor air quality (carbon dioxide). Designed to work with i-Vu controllers and the i-Vu building automation system, the ZS sensor line includes the ZS Standard, ZS Plus, ZS Pro, ZS-Pro-M and ZS Pro-F.

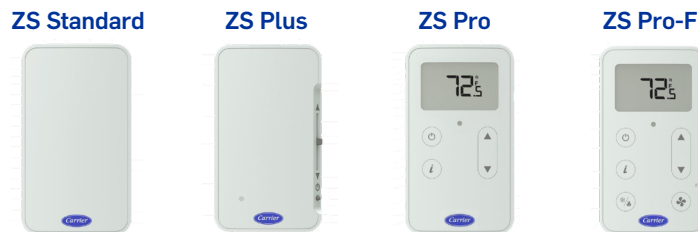


Features

	ZS Standard	ZS Plus	ZS Pro	ZS Pro-F
Temp, CO ₂ , and humidity options	•	•	•	•
Motion sensing option	•	•	•	•
Addressable / supports daisy-chaining	•	•	•	•
Hidden communication port	•	•	•	•
Occupancy status indicator		•	•	•
Push-button occupancy override		•	•	•
Setpoint adjust		•	•	•
Large, easy- to-read LCD			•	•
Alarm indicator			•	•
Fan speed control				•
Cooling / Heating / Fan Only - mode control				•
°F to °C conversion button				•



ZS Pro with Motion

ZS2PL-HCM-CAR

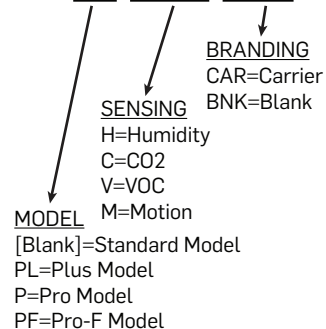

Parts Available

ZS Standard	ZS Plus	ZS Pro	ZS Pro (cont.)	ZS Pro-F
ZS2-CAR	ZS2PL-CAR	ZS2P-CAR	ZS2P-CM-CAR	ZS2PF-CAR
ZS2-C-CAR	ZS2PL-C-CAR	ZS2P-C-CAR	ZS2P-HM-CAR	ZS2PF-C-CAR
ZS2-H-CAR	ZS2PL-H-CAR	ZS2P-H-CAR	ZS2P-HCM-CAR	ZS2PF-H-CAR
ZS2-HC-CAR	ZS2PL-HC-CAR	ZS2P-HC-CAR	ZS2P-HVM-CAR	ZS2PF-HC-CAR
ZS2-M-CAR	ZS2PL-M-CAR	ZS2P-HV-CAR		ZS2PF-M-CAR
ZS2-HCM-CAR	ZS2PL-HCM-CAR	ZS2P-M-CAR		ZS2PF-HV-CAR
				ZS2PF-HCM-CAR

*Note: To order a sensor without a Carrier logo, use "BNK" in place of "CAR" above. Some models are only available without a logo.

i-Vu® Building Automation System

ZS Space Sensors



Sensing Element	Range	Accuracy
Temperature with any Option (excluding Humidity)	32° F to 122° F (0° C to 50° C)	±0.35° F (0.2° C)
Temperature with Humidity and any Option	50° F to 104° F (10° C to 40° C)	±0.5° F (0.3° C)
Humidity	20% to 80%	±2% typical
CO ₂	400 to 1250 PPM 1250 to 2000 PPM	±30 PPM or +/- 3% of reading (greater of two) 5% of reading plus 30 PPM
Volatile Organic Compounds (VOC)	0 to 2000 PPM	±100 PPM


Power Requirements	Sensor Type	Power Required
Temperature Only	All Models	12 Vdc @ 8 mA
with Humidity	All Models	12 Vdc @ 8 mA
with VOC	All Models	12 Vdc @ 60 mA
with CO ₂	All Models	12 Vdc @ 15 mA (idle) to 190 mA (CO ₂ measurement cycle)

Specifications

Power Supply	A controller supplies the Rnet sensor network with 12 Vdc @ 210 mA. Additional power may be required for your application. See sensor power requirements above.
Communication	115 kbps Rnet connection between sensor(s) and controller 15 sensors max per Rnet network; 5 sensors max per control program.
Local Access Port	For connecting a laptop computer to the local equipment or i-Vu network for maintenance and commissioning.

Motion Sensing

Top View



Sensor Type: passive infrared (PIR)


Distance: 16.4 ft. (5 m)

Detection Range: (HxV) 100° x 82°

Movement Speed: 2.62 to 3.94 ft/s (0.8 to 1.2 m/s)

Detection Object: 27.56 x 9.84 in. (700 x 250 mm)

Side View



Environmental Operating Range	32° F to 122° F (0° - 50° C), 10% to 90% relative humidity, non-condensing
--------------------------------------	--

Mounting Dimensions	Standard 4"x 2" electrical box using provided 6/32" x 1/2" mounting screws
----------------------------	--

Dimensions

Overall

Width: 2.75 in. (6.99 cm)

Depth: 0.858 in. (2.18 cm)

Height: 4.75 in. (12.07 cm)

